

# **SPECIFICATION**

**Graphic Type STN Dot Matrix LCD Module**

**JM240128A**

---

**GENERAL SPECIFICATION**

240 X 128 dot display

Toshiba LCD controller: T6963C

Toshiba LCD driver: T6A39 and T6A40

Interface with 8-bit MPU (directly connected to Z80 serial MPU)

**Display Specification**

Display Mode: graphic, text and combination text-graphic mode

Display Dot: 240 X 128

Display type: STN and FSTN

Display color-Display background color: Yellow-Green; Blue-Gray; Black-White

Polarizer mode: Positive,Negative; Reflective , Transflective,Transmissive

Viewing angle: 6:00 and 12:00

Display duty: 1/128

Driving bias: 1/12

Selectable character font: 6 X 8 or 8 X 8

**Memory and External Memory:**

A standard 128-word character generator ROM

8KB or 32KB external display RAM (static RAM)

**Mechanical characteristics (Unit:mm)**

Extenal dimension: 144.0 X 104.0 X 10.0 (15.0 for Side LED Backlight)

154.0 X 104.0 X 15.0 for CCFL Backlight

View area: 114.0 X 64.0

Dot size: 0.4 X 0.4


Dot pitch: 0.45 X 0.45

Weight:120g(145g for Side LED Backlight; 160g for CCFL Backlight)

**POWER:** negative power, +5V power

## ● Optical Characteristics

### (1) Definition of viewing Angle

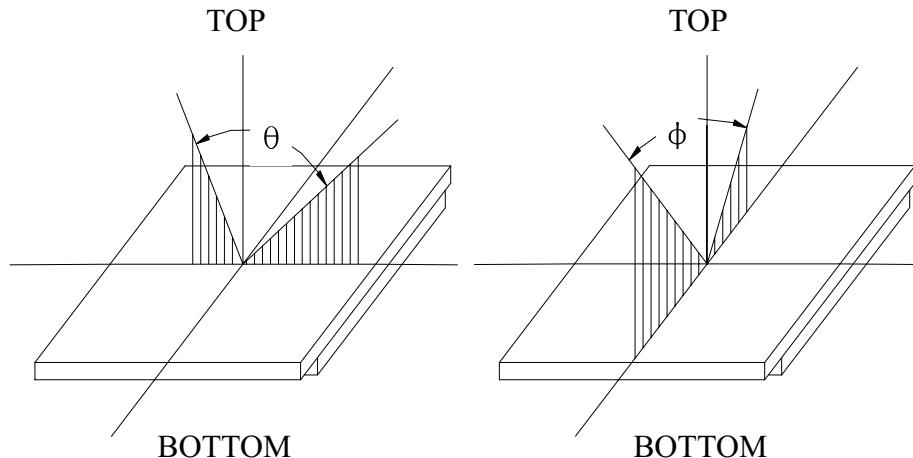


### (2) Definition of Contrast Ratio:

$$\text{Contrast Ratio} = \frac{\text{Reflectance value of non-selected state brightness}}{\text{Reflectance value of selected state brightness}}$$


Test condition : standard A light source

### (3) Response Time


Response time is measured as the shortest period of time possible between the change in state of an LCD segment as demonstrated below

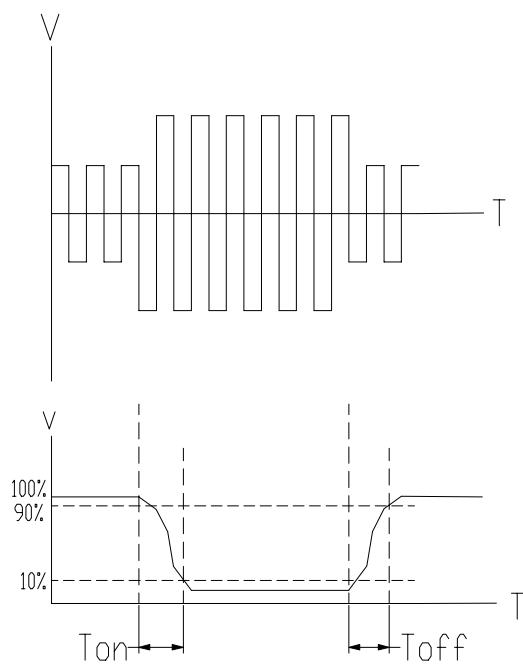

- **External Dimension** ( for Side LED Backlight )

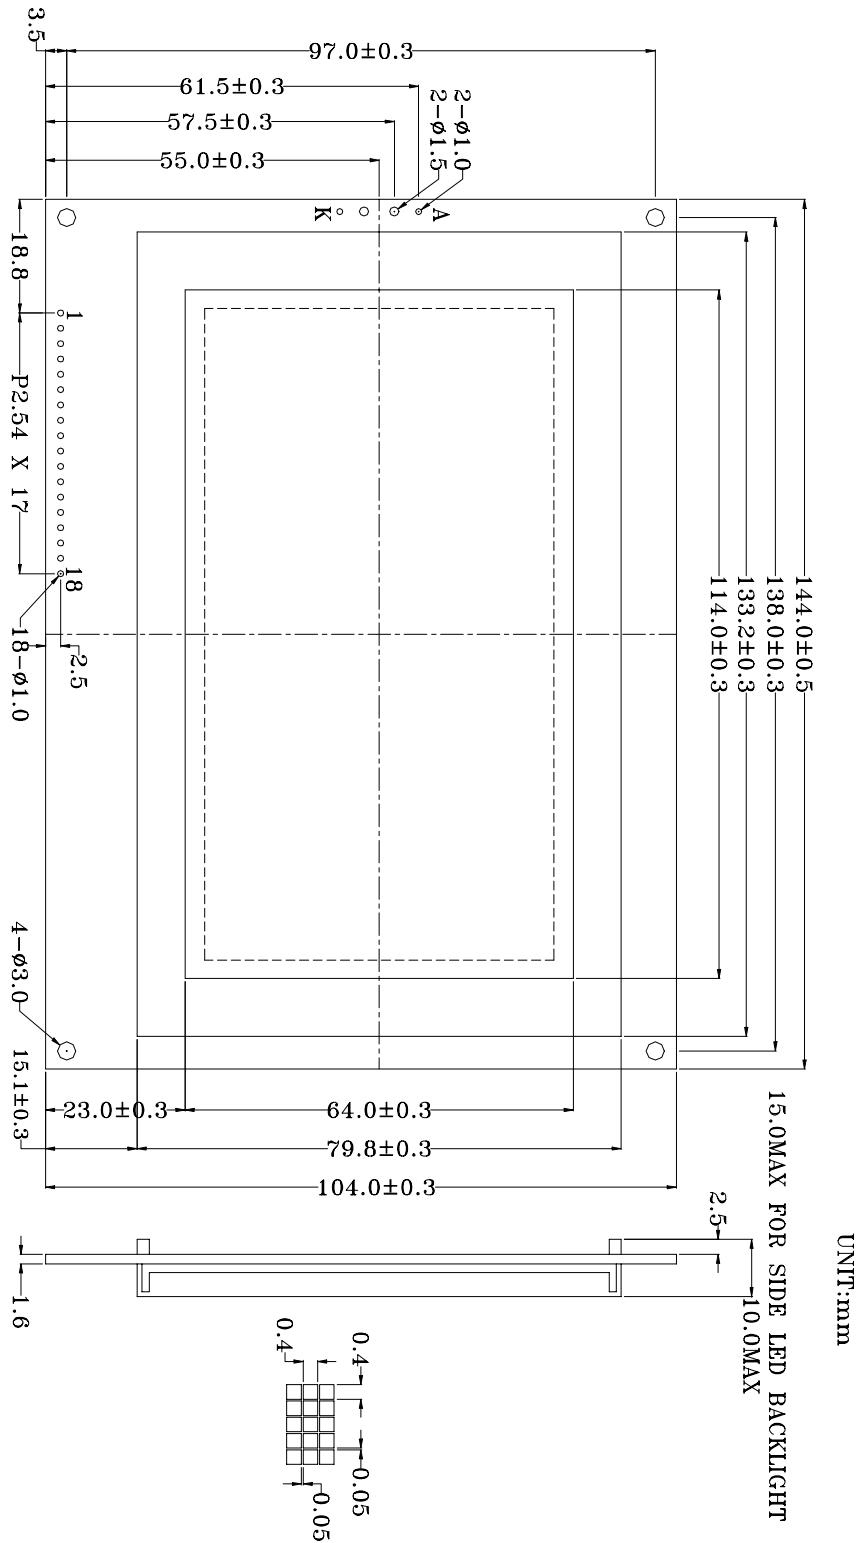

● External Dimension ( for CCFL Backlight )

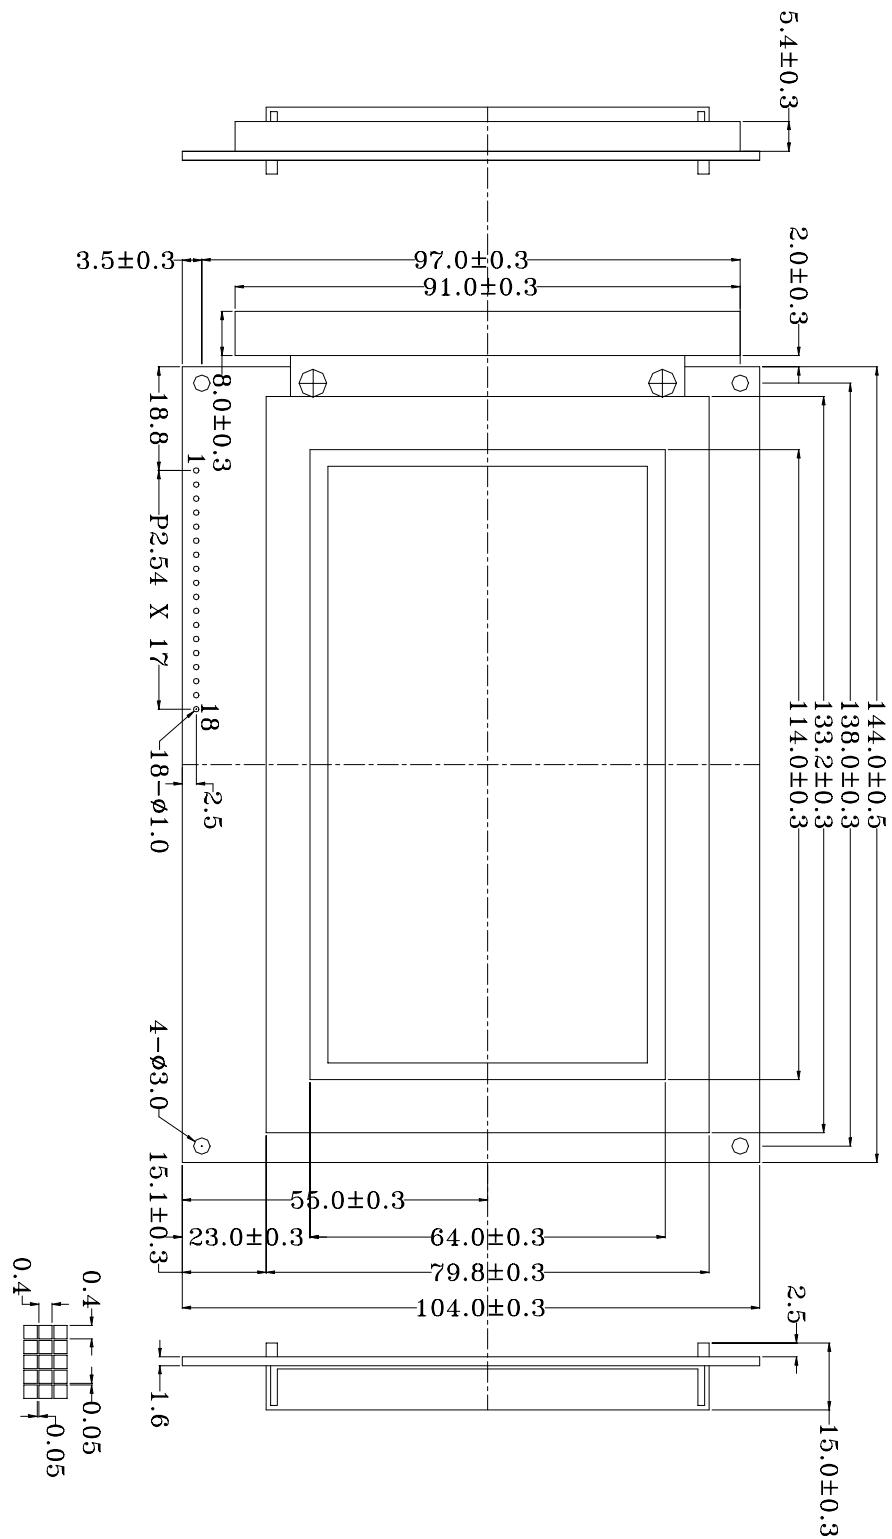

### ● Absolute Maximum Ratings For Side LED Backlight

Parameter	Symbol	Test condition	Min	Type	Max	Unit
LED Forward Consumption Current	I <sub>f</sub>	Ta=25°C Vf=4.1V	-	110	-	mA
LED Allowable Dissipation	P <sub>d</sub>		-	460	-	mW

### ● Absolute Maximum Ratings For CCFL Backlight

Parameter	Symbol	Test condition	Min	Type	Max	Unit
Invertor input voltage	V <sub>i</sub>	-	0	5	12	V(DC)
CCFL operating voltage	V <sub>CCFL</sub>	-	200	-	800	V(AC)
CCFL operating current	I <sub>f</sub>	-	-	5	-	mA
CCFL power Consumption	P <sub>d</sub>	-	1.0		4.2	W

CCFL backlight must be applied with CCFL backlight invertor(DC/AC invertor)


### ● Absolute Maximum Ratings

Item	Symbol	Condition	Standard Value		Unit
			min	max	
Supply Voltage for logic	V <sub>dd</sub>	Ta=25°C	-0.3	7.0	V
Supply Voltage for LCD	V <sub>ee</sub>		V <sub>dd</sub> -28	V <sub>dd</sub> -8	V
Input Voltage	V <sub>r</sub>		-0.3	V <sub>dd</sub> +0.3	V
Operating Temperature	T <sub>op</sub>	-	0	50	°C
Storage Temperature	T <sub>stg</sub>	-	-20	70	°C


### ● Electrical Characteristics (Ta=25°C, V<sub>dd</sub>= 5.0V)

Item	Symbol	Condition	Standard Value			Unit
			min	Type	max	
Supply Voltage for logic	V <sub>dd</sub> -V <sub>ss</sub>	-	4.75	5.0	5.25	V
Supply Current for logic	I <sub>dd</sub>	V <sub>dd</sub> = 5.0	-	9.5	-	mA
Driving Current for LCD	I <sub>ee</sub>	V <sub>ee</sub> = -14	-	4.6	-	mA
Driving Voltage for LCD	V <sub>dd</sub> -V <sub>ee</sub>	25°C	-	19	-	V
Input Voltage “H” level	V <sub>ih</sub>	H	V <sub>dd</sub> -2.2	-	V <sub>dd</sub>	V
Input Voltage “L” level	V <sub>il</sub>	L	0	-	0.8	V

- Block Diagram

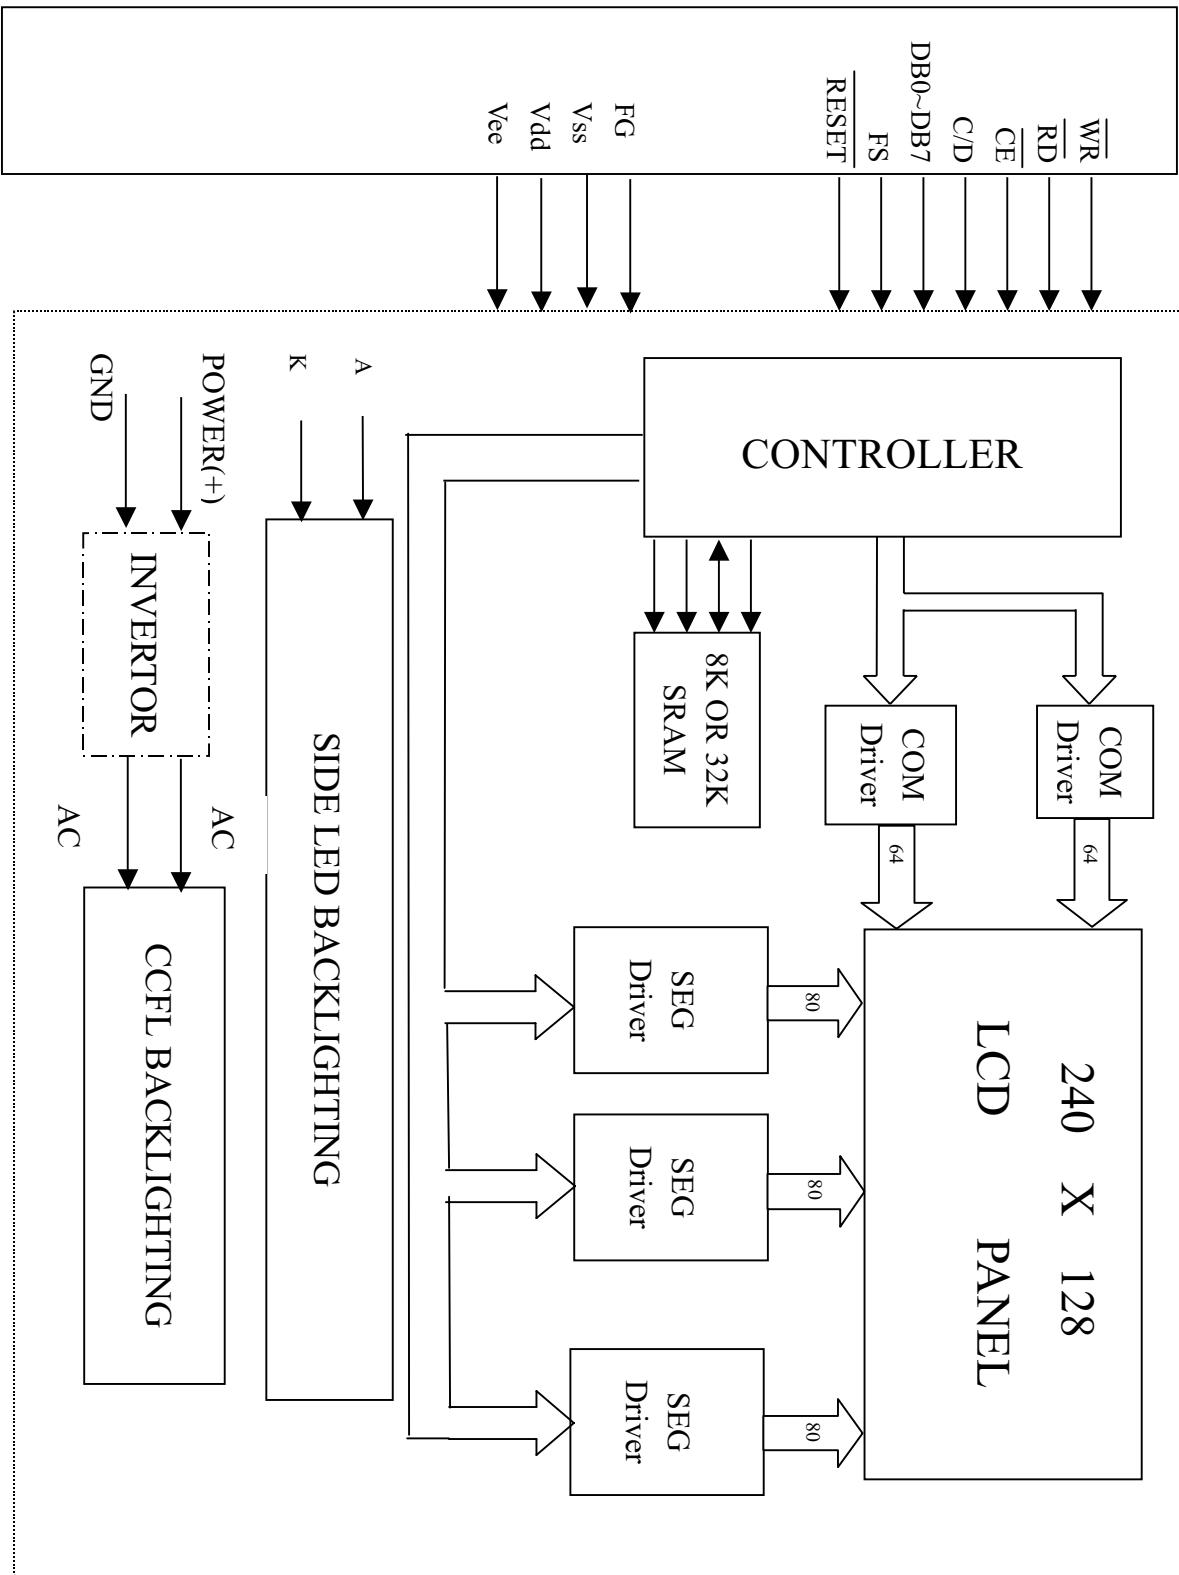

## ● Bus Timing

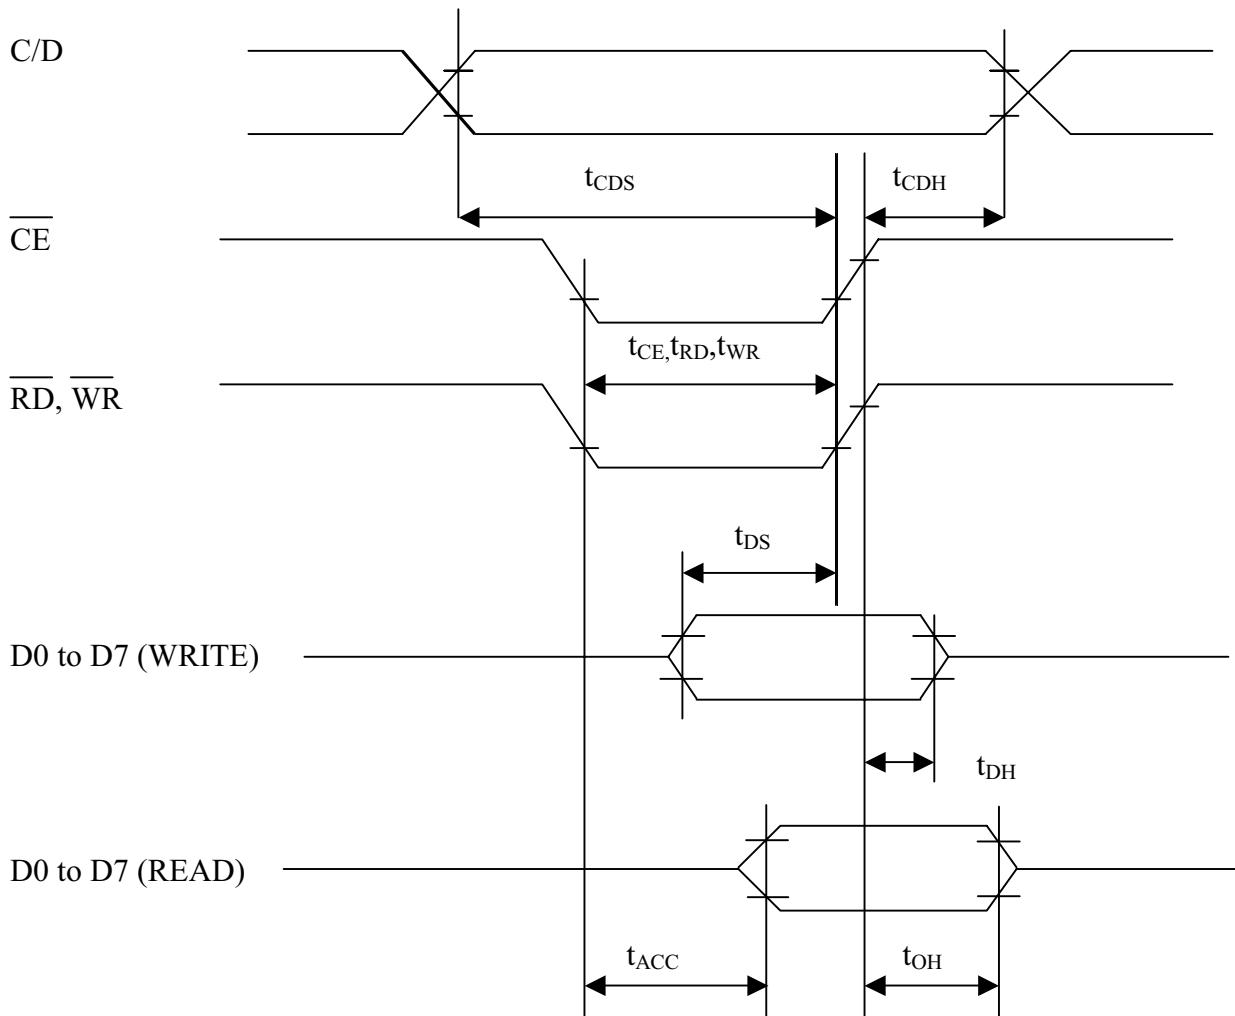

TEST CONDITIONS (Unless otherwise noted,  $V_{dd}=5.0V \pm 10\%$ ,  $V_{ss}=0V$ ,  $T_a=-20$  to  $75^\circ C$ )

ITEM	SYMBOL	MIN	MAX	UNIT
C/D Set-up Time	$t_{CDS}$	100	-	ns
C/D Hold Time	$t_{CDH}$	10	-	ns
CE, RD, WR Pulse Width	$t_{CE}, t_{RD}, t_{WR}$	80	-	ns
Data Set-up Time	$t_{DS}$	80	-	ns
Data Hold Time	$t_{DH}$	40	-	ns
Access Time	$t_{ACC}$	-	150	ns
Output Hold Time	$t_{OH}$	10	50	ns

**● Pin assignment**

Pin NO.	Symbol	Function	Remark
1	FG	Module Frame Ground	
2	Vss	Power Supply	0V
3	Vdd		+5V
4	Vee		For LCD
5	WR	Data Write	
6	RD	Data Read	
7	CE	Chip Enable	
8	C/D	Command/Data Select	
9	RESET	Reset Signal	
10	DB0	Data Bit 0	
11	DB1	Data Bit 1	
12	DB2	Data Bit 2	
13	DB3	Data Bit 3	
14	DB4	Data Bit 4	
15	DB5	Data Bit 5	
16	DB6	Data Bit 6	
17	DB7	Data Bit 7	
18	FS	Font Selection	
	A	Anode of LED Unit	
	K	Cathode of LED Unit	
	AC	Power for CCFL	
	AC	Power for CCFL	

- Flowchart of communications with MPU

## Status Word

MSB	STA7	STA6	STA5	STA4	STA3	STA2	STA1	STA0	LSB
	D7	D6	D5	D4	D3	D2	D1	D0	

STA0	Check command execution capability	0:Disable 1:Enable
STA1	Check data read/write capability	0:Disable 1:Enable
STA2	Check Auto mode data read capability	0:Disable 1:Enable
STA3	Check Auto mode data write capability	0:Disable 1:Enable
STA4	Not used	
STA5	Check controller operation capability	0:Disable 1:Enable
STA6	Error flag. Used for Screen Peek and Screen copy commands	0:No error 1:Error
STA7	Check the blink condition	0:Display off 1:Normal display

**Note1:** A status check must be performed before data is read or written.

**Note2:** It is necessary to check STA0 and STA1 at the same time.


There is a possibility of erroneous operation due to a hardware interrupt.

**Note3:** For most modes STA0/STA1 are used as a status check.


**Note4:** STA2 and STA3 are valid in Auto mode; STA0 and STA1 are invalid.

## Setting Data

a) The case of 1 data

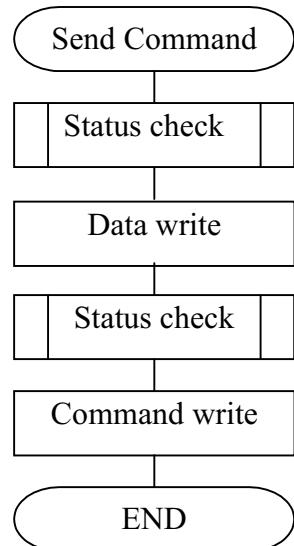

b) The case of 2 data

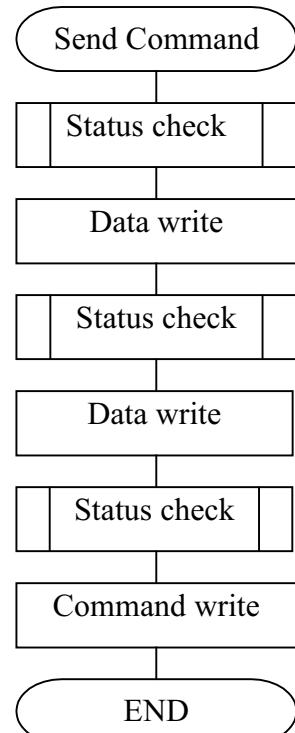

## ● COMMAND DEFINITIONS

COMMAND	CODE	D1	D2	FUNCTION
REGISTERS SETTING	00100001	X address	Y address	Set Cursor Pointer
	00100010	Data	00H	Set Offset Register
	00100100	Low address	High address	Set Address Pointer
SET CONTROL WORD	01000000	Low address	High address	Set Text Home Address
	01000001	Columns	00H	Set Text Area
	01000010	Low address	High address	Set Graphic Home Address
	01000011	Columns	00H	Set Graphic Area

COMMAND	CODE	D1	D2	FUNCTION
MODE SET	1000X000	—	—	OR mode
	1000X001	—	—	EXOR mode
	1000X011	—	—	AND mode
	1000X100	—	—	Text Attribute mode
	10000XXX	—	—	Internal CG ROM mode
	10001XXX	—	—	External CG RAM mode
DISPLAY MODE	10010000	—	—	Display off
	1001XX10	—	—	Cursor on, blink off
	1001XX11	—	—	Cursor on, blink on
	100101XX	—	—	Text on, graphic off
	100110XX	—	—	Text off, graphic on
	100111XX	—	—	Text on, graphic on
CURSOR PATTERN SELECT	10100000	—	—	1-line cursor
	10100001	—	—	2-line cursor
	10100010	—	—	3-line cursor
	10100011	—	—	4-line cursor
	10100100	—	—	5-line cursor
	10100101	—	—	6-line cursor
	10100110	—	—	7-line cursor
	10100111	—	—	8-line cursor
DATA AUTO READ/WRITE	10110000	—	—	Set Data Auto Write
	10110001	—	—	Set Data Auto Read
	10110010	—	—	Auto Reset
DATA READ/WRITE	110000000	Data	—	Data Write and Increment ADP
	110000001	—	—	Data Read and Increment ADP
	11000010	Data	—	Data Write and Decrement ADP
	11000011	—	—	Data Read and Decrement ADP
	11000100	Data	—	Data Write and Non-variable ADP
	11000101	—	—	Data Read and Non-variable ADP
SCREEN PEEK	11100000	—	—	Screen Peek
SCREEN COPY	11101000	—	—	Screen Copy
BIT SET/RESET	11110XXX	—	—	Bit Reset
	11111XXX	—	—	Bit Set
	1111X000	—	—	Bit 0 (LSB)
	1111X001	—	—	Bit1
	1111X010	—	—	Bit2
	1111X011	—	—	Bit3
	1111X100	—	—	Bit4
	1111X101	—	—	Bit5
	1111X110	—	—	Bit6
	1111X111	—	—	Bit 7 (MSB)

**Note:** First set the data, then set the command.

## ● Description of Command

### Setting Registers

#### (1) Set Cursor Pointer

The position of the cursor is specified by X ADRS and Y ADRS. The cursor position can only be moved by this command. Data read/write from the MPU never changes the cursor pointer.

X ADRS: 00H to 4FH(lower 7 bits are valid); Y ADRS: 00H to 1FH(lower 5 bits are valid)

a) Single-Scan

X ADRS 00 to 4FH

Y ADRS 00H to 0FH

b) Dual-Scan

X ADRS 00H to 4FH

Y ADRS 00H to 0FH


Upper screen

Y ADRS 10H to 1FH

Lower screen

#### (2) Set Offset Register

The offset register is used to determine the external character generator RAM area.

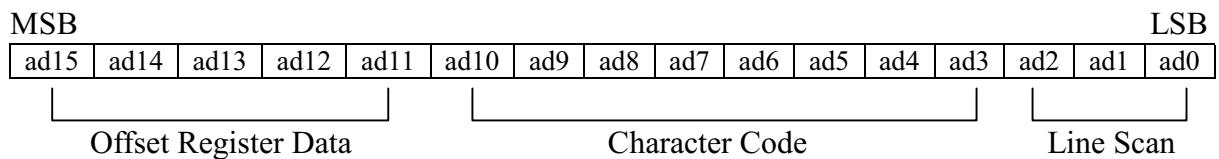

The senior five bits define the start address in external memory of the CG RAM area. The next eight bits represent the character code of the character. In internal CG ROM mode, character codes 00H to 7FH represent the predefined “internal” CG ROM characters, and codes 80H to FFH represent the user’s own “external” characters. In external CG RAM mode, all 256 codes from 00H to FFH can be used to represent the user’s own characters.

The three least significant bits indicate one of the eight rows of eight dots that define the character’s shape.


The relationship between display RAM address and offset register

Offset register data	CG RAM hex. Address (start to end)
00000	0000 to 07FFH
00001	0800 to 0FFFH
00010	1000 to 17FFH
11100	E000 to E7FFH
11101	E800 to EFFFH
11110	F000 to F7FFH
11111	F800 to FFFFH

**Example1:**

Offset register	02H
Character code	80H
Character generator RAM start address	0001 0100 0000 0000
	1      4      0      0      H

(address)	(data)
1400H	00H
1401H	1FH
1402H	04H
1403H	04H
1404H	04H
1405H	04H
1406H	04H
1407H	00H


**Example 2:**

The relationship between display RAM data and display characters:


Display character	(RAM DATA)	(Character)
AB γ DE ζ GHUJKLM	21H	A
	22H	B
	83H	γ
	24H	D
	25H	E
	86H	ζ

\* γ and ζ are displayed by character generator RAM

**(3) Set Address Pointer**

The Set Address Pointer command is used to indicate the start address for writing to (or reading from) external RAM.

The Flowchart for set Address Pointer command

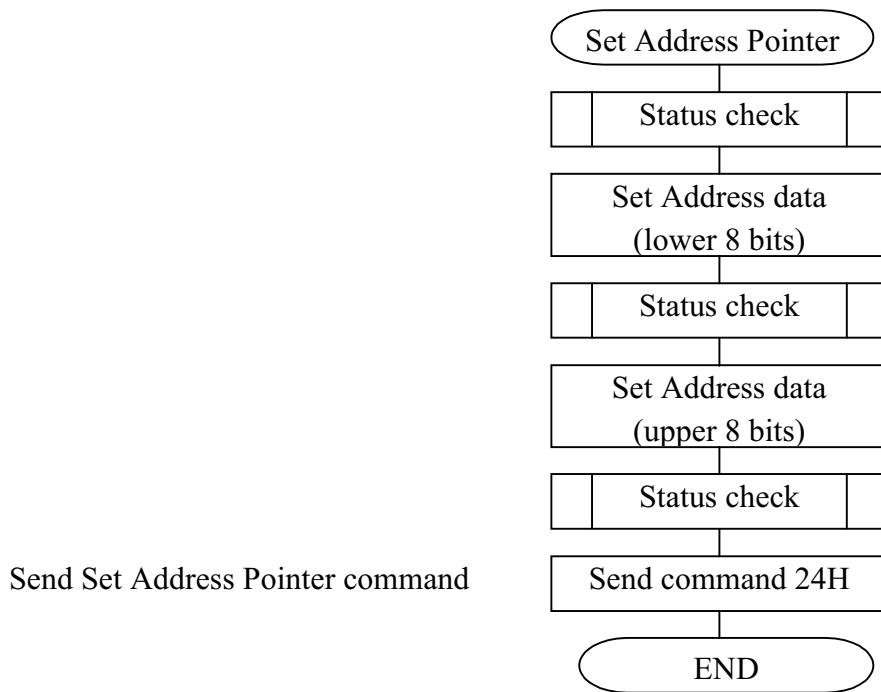

## Set Control Word

The home address and column size are defined by this command.

### (1) Set Text Home Address

The starting address in the external display RAM for text display is defined by this command. The text home address indicates the leftmost and uppermost position.

The relationship between external display RAM address and display position.

TH	-----	TH+CL
TH+TA	-----	TH+TA+CL
(TH+TA)+TA	-----	TH+2TA+CL
-----	-----	-----
TH+(N-1)TA	-----	TH+(N-1)TA+CL

TH: Text home address

TA: Text area number (columns)

CL: Columns are fixed by hardware (pin-programmable).

#### Example:

Text home address: 0000H

Text area: 0020H

MD2=H, MD3=H: 32 columns

DUAL=H, MDS=L, MD0=L, MD1=H: 4lines

0000H	0001H	-----	001EH	001FH
0020H	0021H	-----	003EH	003FH
0040H	0041H	-----	005EH	005FH
0060H	0061H	-----	007EH	007FH

## (2) Set Graphic Home Address

The starting address of the external display RAM used for graphic display is defined by this command. The graphic home address indicates the leftmost and uppermost position. The relationship between external display RAM address and display position

GH	-----	GH+CL
GH+GA	-----	GH+GA+CL
(GH+GA)+GA	-----	GH+2GA+CL
-----	-----	-----
GH+(N-1)GA	-----	GH+(N-1)GA+CL

GH: Graphic home address

GA: Graphic area number (columns)

CL: Columns are fixed by hardware (pin-programmable).

### Example:

Graphic home address: 0000H	Graphic area: 0020H
MD2=H, MD3=H: 32 columns	DUAL=H, MDS=L, MD0=H, MD1=H: 2lines
<hr/>	
0000H	0001H
0020H	0021H
0040H	0041H
0060H	0061H
0080H	0081H
00A0H	00A1H
00C0H	00C1H
00E0H	00E1H
0100H	0101H
0120H	0121H
0140H	0141H
0160H	0161H
0180H	0181H
01A0H	01A1H
01C0H	01C1H
01E0H	01E1H
001EH	003EH
005EH	007EH
009EH	00BFH
00DEH	00DFH
00FEH	00FFH
011EH	013FH
013EH	015FH
015EH	017FH
017EH	019FH
019EH	01BFH
01BEH	01DFH
01DEH	01FFH

## (3) Set Text Area

This command can be used to define the columns of the test display.

### Example:

LCD size: 20 columns, 4lines	Text home address: 0000H
Text area: 0014H	MD2=H, MD3=H: 32 columns
DUAL=H, MDS=L, MD0=L, MD1=H: 4lines	

0000	0001	-----	0013	0014	-----	001F
0014	0015	-----	0027	0028	-----	0033
0028	0029	-----	003B	003C	-----	0047
003C	003D	-----	004F	0050	-----	005B



#### (4) Set Graphic Area

This command can be used define the columns of the graphic display.

**Example:** LCD size: 20 columns, 2lines      Graphic home address: 0000H  
 Graphic area: 0014H      MD2=H, MD3=H: 0014H

DUAL=H, MDS=L, MD0=H, MD1=H: 2lines


0000	0001	-----	0013	0014	-----	001F
0014	0015	-----	0027	0028	-----	0033
0028	0029	-----	003B	003C	-----	0047
003C	003D	-----	004F	0050	-----	005B
0050	0051	-----	0063	0064	-----	006F
0064	0065	-----	0077	0078	-----	0083
0078	0079	-----	008B	008C	-----	0097
008C	008D	-----	009F	00A0	-----	00AB
00A0	00A1	-----	00B3	00B4	-----	00BF
00B4	00B5	-----	00C7	00C8	-----	00D3
00C8	00C9	-----	00DB	00DC	-----	00E7
00DC	00DD	-----	00EF	00F0	-----	00FD
00F0	00F1	-----	0103	0104	-----	011F
0104	0105	-----	0127	0128	-----	0123
0128	0129	-----	013B	013C	-----	0147
013C	013D	-----	014F	0150	-----	015B

→ LCD DISPLAY ←


#### Mode Set

The display mode does not change until the next command is sent. In Internal Character Generator mode, character codes 00H to 7FH are assigned to the built-in character generator RAM. The character codes 80H to FFH are automatically assigned to the external character generator RAM.


**Example:** (Note: Attribute functions can only be applied to text display, since the attribute data is placed in the graphic RAM area.)




GRAPHIC




TEXT



“ OR ”



“ AND ”



“ EXOR ”

## Attribute Function

The attribute operations are Reverse display, Character blink and inhibit. The attribute data is written into the graphic area which was defined by the Set Control Word command. Only text display is possible in Attribute function mode; graphic display is automatically disabled. However, the Display Mode command must be used to turn both Text and Graphic on in order for the Attribute function to be available.

Attribute RAM 1byte

X	X	X	X	d3	d2	d1	d0
---	---	---	---	----	----	----	----

d3	d2	d1	d0	FUNCTION
0	0	0	0	Normal display
0	1	0	1	Reverse display
0	0	1	1	Inhibit display
1	0	0	0	Blink of normal display
1	1	0	1	Blink of reverse display
1	0	1	1	Blink of inhibit of display

X: invalid


## Display Mode

It is necessary to turn on “Text display” and “Graphic display” in the following cases.


- a) Combination of text/graphic display
- b) Attribute function

## Cursor Pattern Select


When cursor display is ON, this command selects the cursor pattern in the range 1 line to 8lines. The cursor address is defined by the Cursor Pointer Set command.



1-line cursor



2-line cursor



8-line cursor

## Data Auto Read/Write


This command is convenient for sending a full screen of data from the external display RAM. After setting Auto mode, a Data Write (or Read) command is need not be sent between each datum. A Data Auto Write (or Read) command must be sent after a Set Address Pointer command. After this command, the address pointer is automatically incremented by 1 after each datum. In Auto mode, the LCM cannot accept any other commands. The Auto Rest command must be sent to the LCM after all data has been sent, to clear Auto mode.

## Data Read/Write

This command is used for writing data from the MPU to external display RAM, and reading data from external display RAM to the MPU. Data Write/Read should be executed after setting address using Set Address Pointer command. The address pointer can be automatically incremented or decrement using this command.

**Note :** This command is necessary for each 1-byte datum.

Refer to the following flowchart

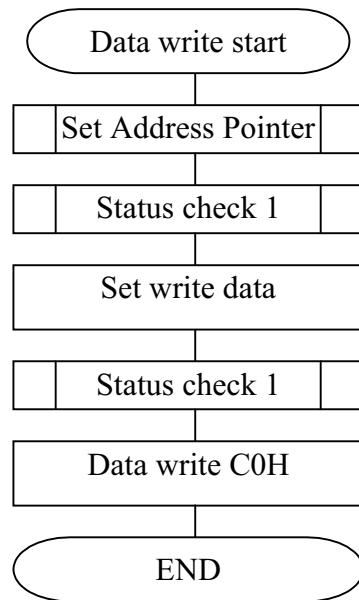

## Screen Peek


The command is used to transfer 1 byte of displayed data to the data stack ; this byte can then be read from the MPU by data access. The logical combination of text and graphic display data on the LCD screen can be read by this command.

The status (STA6) should be checked just after the Screen Peek command. If the address determined by the Set Address Pointer command is not in the graphic area, this command is ignored and a status flag (STA6) is set.

Refer to the following flowchart

**Note:** This command is available when hardware column number and software column number are the same. Hardware column number is related to MD2 and MD3 setting.

Software column number is related to Set Text Area and Set Graphic Area command.

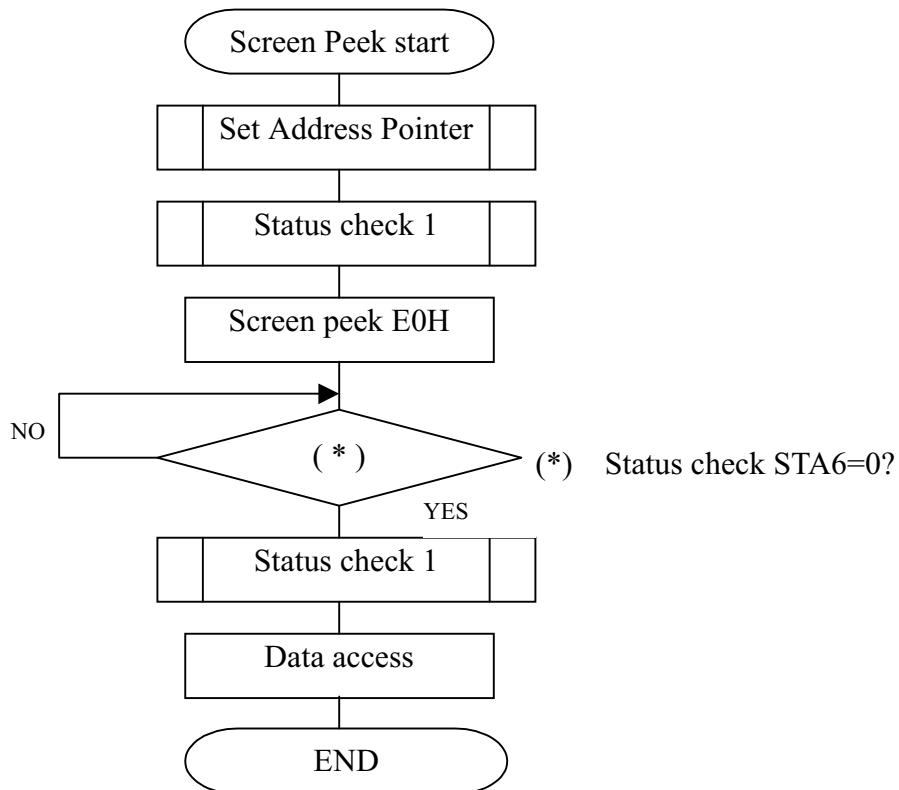


**(Note)** This command is available when hardware column number and software column number are the same. Hardware column number is related to MD2 and MD3 setting. Software column number is related to Set Text Area and Set Graphic Area command.

## Screen Copy

This command copies a single raster line of data to the graphic area.  
The start point must be set using the Set Address Pointer command.

Refer to the following flowchart :

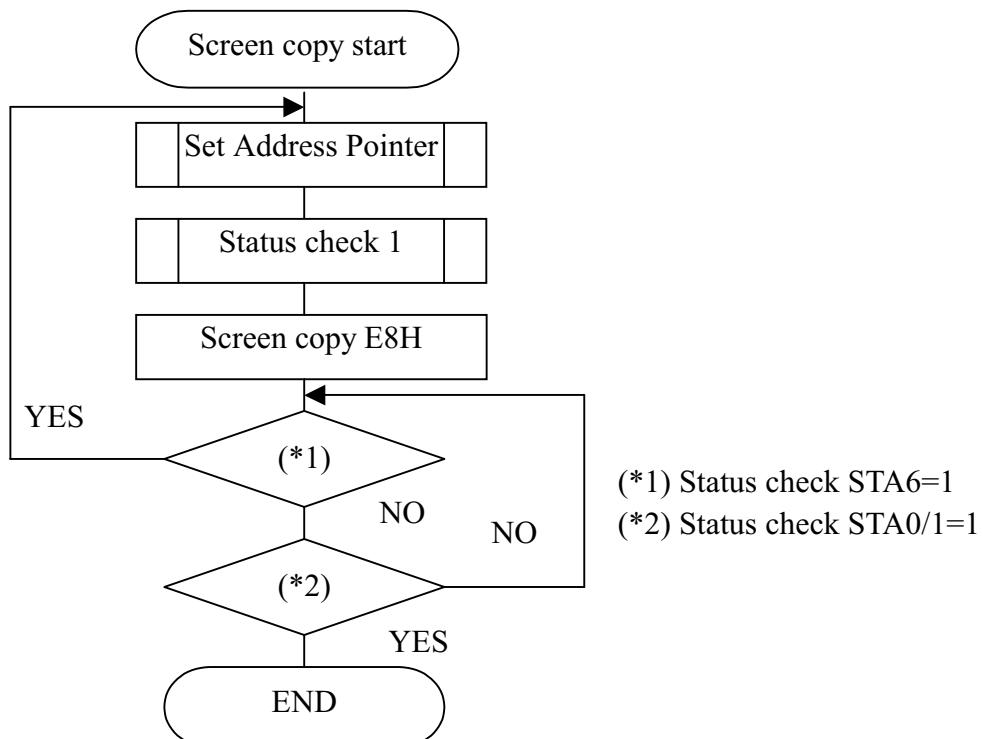

**Note1:** If the attribute function is being used, this command is not available.(With Attribute data is graphic area data)


**Note2:** With Dual-Scan, this command cannot be used (because the LCM cannot separate the upper screen data and lower screen data).

**Note3:** This command is available when hardware column number and software column number are the same.

## Bit Set/Reset


This command use to set or reset a bit of the byte specified by the address pointer. Only one bit can be set/rest at a time.

Refer to the following flowchart:

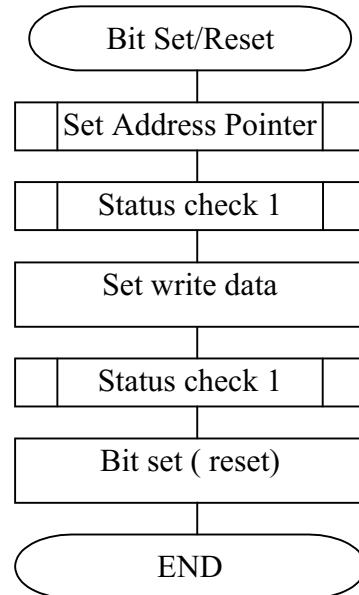

## ● Application Example

### Application Circuit

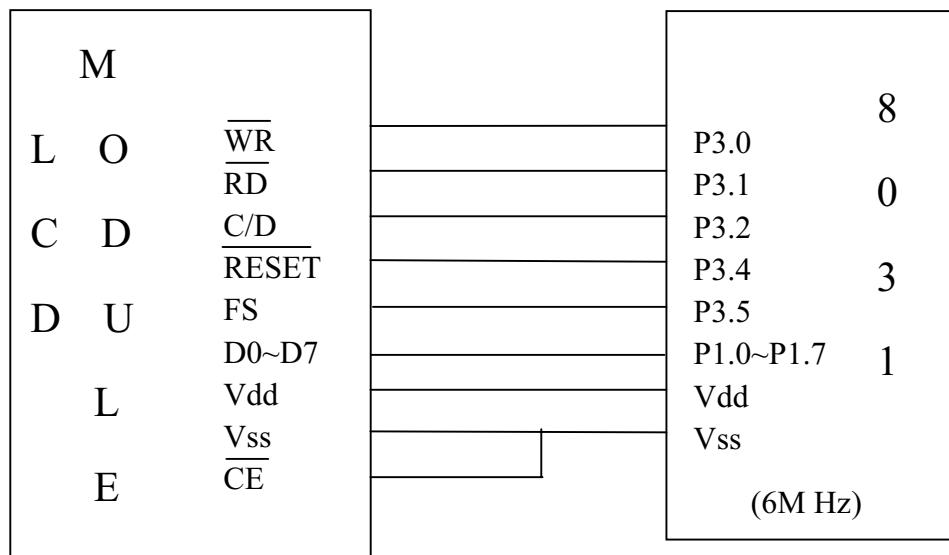

## Program Example

```
;*****THIS IS 51 PROGRAM(240128)*****
;    P3.0    P3.1    P3.2    P3.4    P3.5
;    WR      RD      C/D     SET     FS1
;*****=====
WR      EQU    P3.0
RD      EQU    P3.1
C/D     EQU    P3.2
SET     EQU    P3.4
FS1     EQU    P3.5
X       EQU    30H
Y       EQU    31H
;*****=====
ORG    0000H

        SETB    SET
        MOV     R5,#01H
REST: CLR     SET
        LCALL   T1
        SETB    SET
        LCALL   T1
        DJNZ   R5,REST
        SETB    WR
        SETB    RD
        SETB    C/D
        CLR     FS1
;-----INIT SET 0
MAIN: LCALL   AA3
        MOV     P1,#00H
        LCALL   DAT
        MOV     P1,#00H
        LCALL   DAT
        MOV     P1,#42H
        LCALL   INS
        MOV     R6,#40H
;-----CLEAR  00
        MOV     P1,#98H
        LCALL   INS
        MOV     P1,#80H
        LCALL   INS
        LCALL   AA3
```

```
        MOV    R6, #80H
LOOP1: MOV    DPTR, #TAB6
        LCALL   A5
        DJNZ    R6, LOOP1
        MOV    P1,#00H
        LCALL   DAT
        MOV    P1,#00H
        LCALL   DAT
        MOV    P1,#24H
        LCALL   INS
        MOV    P1,#0F0H
        LCALL   INS
;-----FULL GRAP;
        MOV    P1,#98H
        LCALL   INS
        MOV    P1,#80H
        LCALL   INS
        LCALL   AA3
        MOV    R6, #80H
LOOP2: MOV    DPTR, #TAB5
        LCALL   A5
        DJNZ    R6, LOOP2
;-----ONE MEI HUA
        MOV    P1, #98H
        LCALL   INS
        MOV    P1, #80H
        LCALL   AA3
        MOV    R6, #40H
LOP:   MOV    DPTR,#TAB7
        LCALL   AAA5
        DJNZ    R6, LOP
;-----CLP ONE MEI HUA
        MOV    P1, #98H
        LCALL   INS
        MOV    P1, #80H
        LCALL   AA3
        MOV    R6, #40H
LOP24: MOV    DPTR,#TAB8
        LCALL   AAA5
        DJNZ    R6, LOP24
;-----FOUR MEI HUA
```

```
CLR    FS1
MOV    P1, #98H
LCALL   INS
MOV    P1, #80H
LCALL   AA3
MOV    R6, #20H
LOP23: MOV    DPTR,#TAB9
        LCALL   AAA6
        DJNZ    R6, LOP23
;-----CLP FOUR MEI HUA
        CLR    FS1
        MOV    P1, #98H
        LCALL   INS
        MOV    P1, #80H
        LCALL   AA3
        MOV    R6, #20H
LOP22: MOV    DPTR,#TB10
        LCALL   AAA6
        DJNZ    R6, LOP22
;-----DISP 1,2,3...
;-----SETB 1BYTE,CURSOR ON
        SETB    FS1
        MOV    P1,#97H
        LCALL   INS
        MOV    P1,#80H
        LCALL   INS
        MOV    P1,#0A7H
        LCALL   INS
        MOV    Y, #00H
        LCALL   AA1
        MOV    R6, #10H
LOOP3: MOV    DPTR, #TAB1
        LCALL   AA5
        INC    Y
        DJNZ    R6, LOOP3
        MOV    P1,#27H
        LCALL   DAT
        MOV    P1,#0FH
        LCALL   DAT
        MOV    P1,#21H
        LCALL   INS
```

```
MOV P1,#00H
LCALL DAT
MOV P1,#10H
LCALL DAT
MOV P1,#24H
LCALL INS
MOV P1,#0FAH
LCALL INS
LCALL T3
;-----SET ATTRIBUTE,THREE MODE
MOV P1,#98H
LCALL INS
MOV P1,#80H
LCALL INS
LCALL AA3
MOV R6, #0C8H
LOOP4: MOV P1,#05H
        LCALL DAT
        MOV P1,#0C0H
        LCALL INS
        DJNZ R6, LOOP4
        MOV R6, #0C8H
LOOP5: MOV P1,#08H
        LCALL DAT
        MOV P1,#0C0H
        LCALL INS
        DJNZ R6, LOOP5
        MOV R6, #0F0H
LOOP6: MOV P1,#03H
        LCALL DAT
        MOV P1,#0C0H
        LCALL INS
        DJNZ R6, LOOP6
        MOV P1,#9CH
        LCALL INS
        MOV P1,#84H
        LCALL INS
        LCALL T3
        LCALL T3
;-----20 CHAR MOVE
        MOV R6, #14H
```

```
    MOV  R3, #00H
LOOP7: MOV  P1,R3
        LCALL  DAT
        MOV  P1,#18H
        LCALL  DAT
        MOV  P1,#40H
        LCALL  INS
        INC   R3
        DJNZ  R6, LOOP7
        LCALL  T3
;-----DISPLAY SHEN ZHEN JING HUA
        CLR   FS1
        LCALL  AAAA
        MOV  P1,#00H
        LCALL  DAT
        MOV  P1,#00H
        LCALL  DAT
        MOV  P1,#24H
        LCALL  INS
        MOV  R6, #80H
        MOV  DPTR,#TAB11
LOPP2: LCALL  ZZZ
        DJNZ  R6, LOPP2
        AJMP  MAIN
;-----
ZZZ:  CLR   A
      MOV  R5, #1EH
ZZZZ: CLR   C/D
      CLR   A
      MOVC  A, @A+DPTR
      MOV  P1,A
      CLR   WR
      SETB  WR
      LCALL  T1
      INC   DPTR
      SETB  C/D
      MOV  P1,#0C0H
      CLR   WR
      SETB  WR
      DJNZ  R5, ZZZZ
      RET
```

```
;*****  
DAT: CLR C/D  
      CLR WR  
      SETB WR  
      RET  
INS: SETB C/D  
      CLR WR  
      SETB WR  
      LCALL T1  
      RET  
AA1: MOV P1,#0FFH ;SET CHAR MODE  
      LCALL DAT  
      MOV P1,#17H  
      LCALL DAT  
      MOV P1,#40H  
      LCALL INS  
      MOV P1,#0FFH  
      LCALL DAT  
      MOV P1,#17H  
      LCALL DAT  
      MOV P1,#24H  
      LCALL INS  
      MOV P1,#28H  
      LCALL DAT  
      MOV P1,#00H  
      LCALL DAT  
      MOV P1,#41H  
      LCALL INS  
      RET  
AA3: MOV P1,#00H ;SET GRAPHIC MODE  
      LCALL DAT  
      MOV P1,#00H  
      LCALL DAT  
      MOV P1,#42H  
      LCALL INS  
      MOV P1,#00H  
      LCALL DAT  
      MOV P1,#00H  
      LCALL DAT  
      MOV P1,#24H  
      LCALL INS
```

```
MOV P1,#28H
LCALL DAT
MOV P1,#00H
LCALL DAT
MOV P1,#43H
LCALL INS
RET
AAAA: MOV P1,#98H
LCALL INS
MOV P1,#80H
LCALL INS
MOV P1,#00H
LCALL DAT
MOV P1,#00H
LCALL DAT
MOV P1,#24H
LCALL INS
MOV P1,#1EH
LCALL DAT
MOV P1,#00H
LCALL DAT
MOV P1,#43H
LCALL INS
RET
AA5: CLR A      ;MOV 40 BYTE
MOV R5,#28H
MOV X,#00H
CDJ2: CLR A
INC X
MOVC A,@A+DPTR
MOV P1,A
LCALL DAT
MOV P1,#0C0H
INC DPTR
LCALL INS
MOV P1,X
LCALL DAT
MOV P1,Y
LCALL DAT
MOV P1,#21H
LCALL INS
```

```
DJNZ    R5,CDJ2
RET
;*****
A5:   CLR    A
      MOV    R5,#28H
ADJ2: CLR    C/D
      CLR    A
      MOVC   A,@A+DPTR
      MOV    P1,A
      CLR    WR
      SETB   WR
      LCALL  T1
      INC    DPTR
      SETB   C/D
      MOV    P1,#0C0H
      CLR    WR
      SETB   WR
      DJNZ   R5,ADJ2
      RET
;*****
AAA5: CLR    A
      MOV    R5, #50H
ZDJ2: CLR    C/D
      CLR    A
      MOVC   A, @A+DPTR
      MOV    P1, A
      CLR    WR
      SETB   WR
      LCALL  T1
      INC    DPTR
      SETB   C/D
      MOV    P1, #0C0H
      CLR    WR
      SETB   WR
      DJNZ   R5, ZDJ2
      RET
;*****
AAA6: CLR    A
      MOV    R5, #0A0H
ZDJ6: CLR    C/D
      CLR    A
```

```

    MOVC   A,    @A+DPTR
    MOV    P1,   A
    CLR    WR
    SETB   WR
    LCALL  T1
    INC    DPTR
    SETB   C/D
    MOV    P1,   #0C0H
    CLR    WR
    SETB   WR
    DJNZ   R5,   ZDJ6
    RET

;***** *****
;                               DELAY 1MS
;***** *****

T2:   MOV   R7,#04H
TTT2: MOV   R2,#0FFH
TTT1: DJNZ  R2,TTT1
      DJNZ  R7,TTT2
      RET

;***** *****
;                               DELAY 64MS
;***** *****

T3:   MOV   R7,#0FFH
TTT3: MOV   R2,#0FFH
TTT4: DJNZ  R2,TTT4
      DJNZ  R7,TTT3
      RET

;***** *****
;                               DELAY 0.25MS
;***** *****

T1:   MOV   R7,#01H
TT2:   MOV   R2, #0FH
TT1:   DJNZ  R2,TT1
      DJNZ  R7,TT2
      RET

;***** *****
;                               DELAY  2S
;***** *****


T4:   MOV   R7, #20H
TTT3:MOV   R2,#0FFH

```

```
TTT2:MOV R3,#0FFH
TTT1:DJNZ R3,TTT1
    DJNZ R2,TTT2
    DJNZ R7,TTT3
    RET
;*****
TAB1:DB 11H,12H,13H,14H,15H,16H,17H,18H
    DB 19H,21H,22H,23H,24H,25H,26H,27H
    DB 28H,29H,2AH,2BH,2CH,2DH,2EH,2FH
    DB 30H,31H,32H,33H,34H,35H,36H,37H
    DB 38H,39H,3AH,3BH,3CH,3DH,3EH,3FH
TAB5:DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH
    DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH
    DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH
    DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH
    DB 0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH,0FFH
TAB6:DB 00H,00H,00H,00H,00H,00H,00H,00H
    DB 00H,00H,00H,00H,00H,00H,00H,00H
    DB 00H,00H,00H,00H,00H,00H,00H,00H
    DB 00H,00H,00H,00H,00H,00H,00H,00H
    DB 00H,00H,00H,00H,00H,00H,00H,00H
TAB7:DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
TAB8:DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 55H,55H,55H,55H,55H,55H,55H,55H,55H
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
    DB 0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH,0AAH
TAB9:DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH
    DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH
    DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH
    DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH
```

```
DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH  
DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH  
DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH  
DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH  
DB 33H,33H,33H,33H,33H,33H,33H,33H,33H,33H  
TB10:DB 33H,33H,33H,33H,33H,33H,33H,33H,33H,33H  
DB 0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH,0CCH  
END
```

## ● Application Circuit

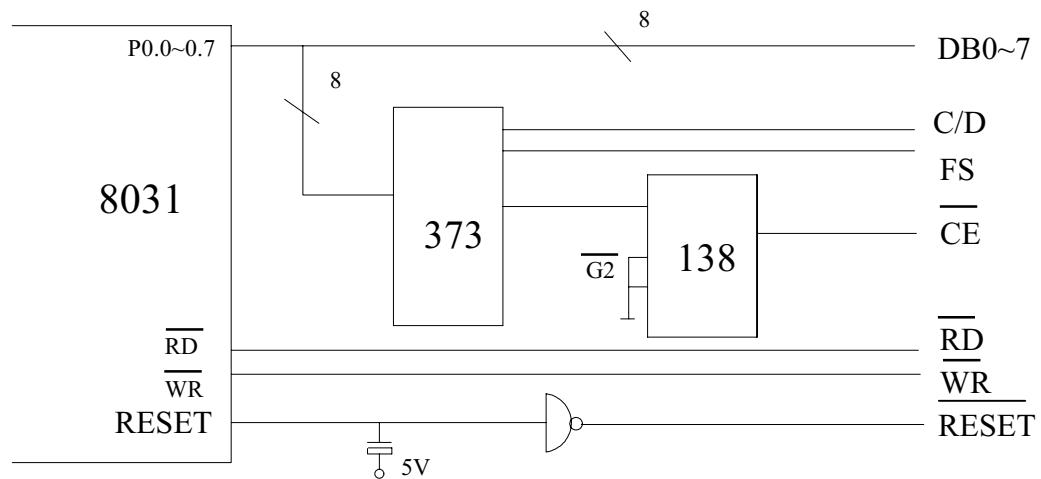

### ● Character Code Map

ROM Code 0101

MSB LSB	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
0	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
2	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
3	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
4	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
5	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
6	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
7	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F