



Serie DMR - Abgewinkelte Printausführung (8.1mm / US Style)

Elektrische Eigenschaften / Electrical Characteristics:


Betriebsstrom / Contact Current Rating	5A
Durchgangswiderstand / Contact Resistance	15mΩ max.
Isolationswiderstand / Insulation Resistance	1000MΩ
Temperaturbereich / Operating Temperature	-55°C to +105°C
Max. Spannung / Dielectric Withstanding Voltage	1000V AC for 1 Min.

Material:


Isolierkörper / Insulator	Glass-Fibered PBT, UL94V-0
Kontakte / Contacts	Phosphor Bronze or Brass
Kontaktauflage / Contact Plated	Hardgold over 50μ" nickel
Gehäuse / Shell	Steel, Tin plated

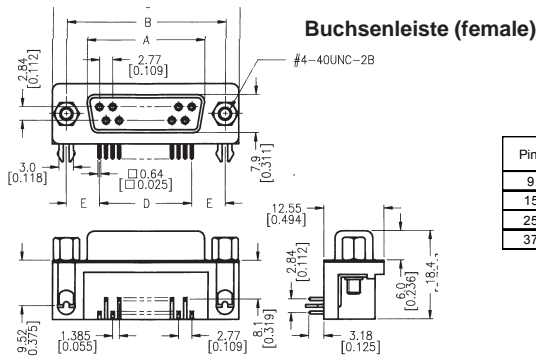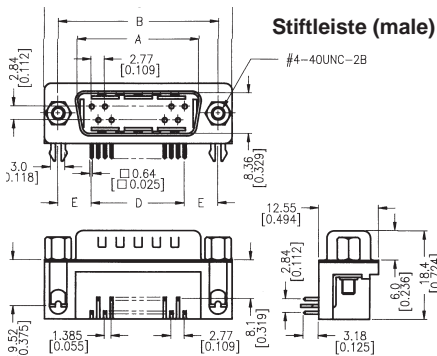

Pins	A (male)	A (fem.)	B	C	D	E
9	16.9	16.3	25	30.8	11.1	7
15	25.3	24.7	33.3	39.1	19.4	7
25	39	38.4	47	53	33.2	6.9
37	55.4	54.8	63.5	69.3	49.9	6.8



Befestigungsoptionen

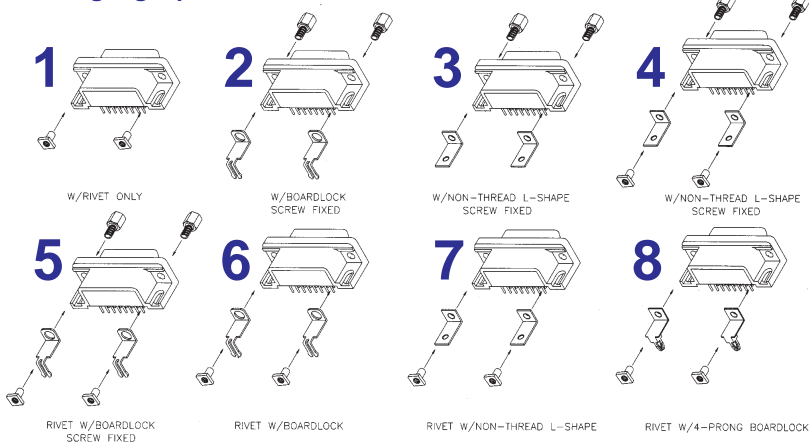

Befestigungsoption 2

Artnr.	Typ	VE	10-	50-	100-	300-
120092	DMR-09P AAC	100				
120152	DMR-15P AAC	70				
120252	DMR-25P AAC	50				
120372	DMR-37P AAC	40				
120093	DMR-09S AAC	90				
120153	DMR-15S AAC	70				
120253	DMR-25S AAC	50				
120373	DMR-37S AAC	40				

Befestigungsoption 6

Artnr.	Typ	VE	10-	50-	100-	250-
120080	DMR-09P BBB	90				
120081	DMR-15P BBB	90				
120082	DMR-25P BBB	90				
120083	DMR-37P BBB	90				
120084	DMR-09S BBB	90				
120085	DMR-15S BBB	90				
120086	DMR-25S BBB	90				
120087	DMR-37S BBB	90				
120020	UNC4-40 Z Schraube 6mm	200				

