


# 2432 SERIES

FFC/FPC CONNECTOR 1.00mm (0.039") NON ZIF

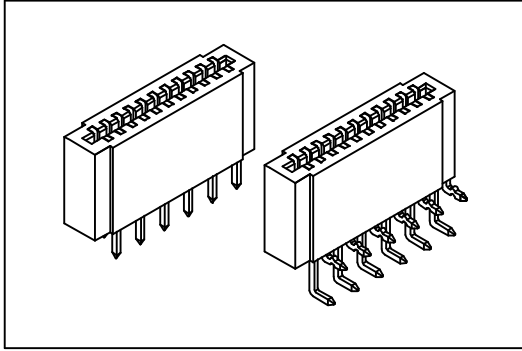

### Material:








Housing: High temperature housing UL94V-0  
withstands IR and VPR soldering methods.  
Contacts: Phosphor Bronze.  
Leg: Brass.  
Plating: Tin plated.

### Electrical Characteristics:

Current Rating: 1 AMP.  
Insulator Resistance: 5000MΩ min. at DC 500V.  
Contact Resistance: 20mΩ max. at DC 100mA.  
Operating Temperature: -65°C ~+125°C.  
Max Processing Temperature: 230°C for 30 to 60 seconds.

### Features:

- \* FFC/FPC Connection, Double Contact, Right angle, Straight and SMD type.
- \* Size 3 through 32 available.
- \* For 0.30mm(0.0118") thick FFC/FPC.

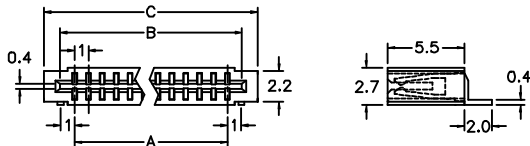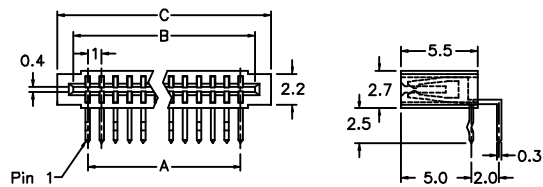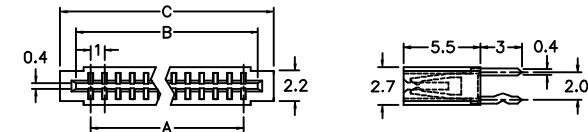

Position	3 Thru 32
Dimension	
A	(No. of Positions X 1.0)-1.0
B	(No. of Positions X 1.0)+1.1
C	(No. of Positions X 1.0)+3.4

## Ordering information

2432- 32

Series No. of Pin Count

T

T: Tin Plated

S

S: Straight  
R: Right Angle  
D: S.M.D. Type